


269A\9217


KIT

| SYM | E.O.'S | DESCRIPTION | DRWN | APP'D | DATE |
|-----|--------|-------------|------|-------|------|
| | | | | | |

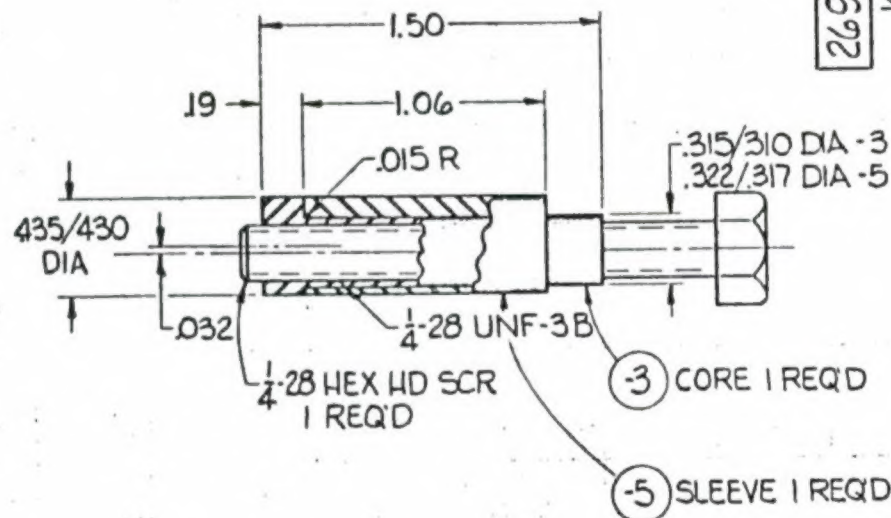

1. TAG IDENTIFY
2. BLACK OXIDE - 3 & -5 PER HP 4-50
3. ALL MACHINED SURFACES

REDUCED SIZE PRINT

| | | | | | | | |
|---------------|----------|----------------|--|------------------|----------------|--|--------------------|
| | | 1 | | SCREW | 4-28 x 2.25 | HEX HD SCR | COMMERCIAL |
| | | 1 | -5 | SLEEVE | .50 DIA x 1.50 | 4130 STEEL | MIL-S-6758 COND F4 |
| | | 1 | -3 | CORE | .50 DIA x 1.06 | 4130 STEEL | MIL-S-6758 COND F4 |
| REQD | PART NO. | REQD | PART NO. | NAME | SIZE | DESCRIPTION | SPECIFICATION |
| ASSEMBLY OPP. | | ASSEMBLY SHOWN | | LIST OF MATERIAL | | | |
| | | | UNLESS OTHERWISE SPECIFIED | DRWN BY | 34-61 | PULLER- HSBG-75 BEARING | |
| | | | DIMENSIONAL TOLERANCES | CHK'D | 1-4-61 | | |
| | | | 3 PLACE DECIMAL ± .010 | APP'D | | | |
| | | | 2 PLACE DECIMAL ± .03 | APP'D | | | |
| | | | ANGULAR ± 0°30' | APP'D | 2-6-61 | | |
| | | | DIMENSIONS TO BE MET BEFORE PLATING. | APP'D | | HUGHES TOOL COMPANY AIRCRAFT DIVISION CULVER CITY, CALIFORNIA  | |
| | | | CORNER RADIUS .062 ON C' BORES AND SPOT FACES OF 1.250 DIA. OR LESS — .093 RADIUS ON GREATER THAN 1.250 DIA. | APP'D | | | |
| | | | | APP'D | | | |
| NEXT ASSY | USED ON | NEXT ASSY | FINAL ASSY | APP'D | | 269 9217 | |
| APPLICATION | | QTY REQD | | APP'D | SCALE TWICE | CODE 02731 SHEET 1 OF 1 | |

METERON-POST CLEARPRINT 10004-10

FD-302 (REV. 1-25-60)

FILE COPY